


<b>NMRA Standard</b>	
<b>Layout Command Control<sup>®</sup> (LCC)</b>	
<b>Event Identifiers</b>	
<b>Feb 6, 2016</b>	<b>S-9.7.0.4</b>

## Adopted as a NMRA Standard

The OpenLCB Standard document appended to this cover sheet has been formally adopted as a NMRA Standard by the NMRA Board of Directors on the date shown in the *Adopted* column in the *Version History* table below.

### 5 Version History

Date	Adopted	Summary of Changes
Feb 17, 2015		Initial version submitted for public comment
Feb 6, 2016	<b>Feb 20, 2016</b>	Minor grammatical corrections and readability improvements as well as the following specific changes: <ul style="list-style-type: none"> <li>• Added "(Normative)" label to <b>4 Format &amp; 5 Allocation</b> section titles</li> <li>• Added Row to <b>5.2 Well-Known Automatically-Routed</b> table</li> <li>• Changes and additions to <b>5.3 Well-Known</b> table</li> </ul>

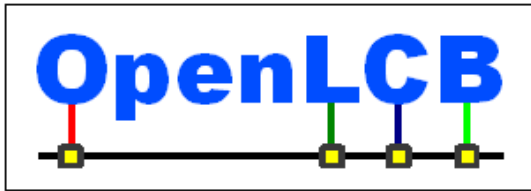

<b>OpenLCB Standard</b>	
<b>Event Identifiers</b>	
<b>Feb 6, 2016</b>	<b>Adopted</b>

## 1 Introduction (Informative)

This standard describes the format and allocation of OpenLCB Event Identifiers (Event IDs). It is not specific to any wire protocol.

## 2 Intended use (Informative)

- 5 This standard defines the format and allocation of Event Identifiers. Event Identifiers are typically used with the Event Transport protocol and are globally unique.

## 3 References and Context (Normative)

This Standard is in the context of the following OpenLCB Standards:

- 10
- The Message Network Standard, which defines the basic messages and how they interact. Higher-level protocols are based on this message network, but are defined elsewhere.
  - The Event Transport Standard, which defines the protocol for transporting events.
  - The Unique Identifiers Standard which defines the format and allocation of unique 48-bit identifiers.

## 4 Format (Normative)

- 15 An OpenLCB event identifier shall be eight bytes of eight bits each. Except as specifically noted within this document, the upper 6-bytes are represented by a uniquely assigned Node ID.

The order of bytes in an OpenLCB Event Identifier shall be considered significant. The most-significant byte shall be transmitted first during communication operations. The most-significant byte shall be written first (left-most in Western format) in any human-readable representation.

- 20 Within the tables below, byte 1 is considered the most-significant byte, while byte 8 is considered the least significant byte.

## 5 Allocation (Normative)

### 5.1 Node ID Based

Value						Suffix		Description
Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8	
6-byte Uniquely Assigned Node ID						*	*	Assigned Node ID event

25

## 5.2 Well-Known Automatically-Routed

The following Event Identifiers are automatically routed between OpenLCB segments through gateways.

Value						Suffix		Description
Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8	
01	00	*	*	*	*	*	*	Well-Known Automatically-Routed Event Identifiers
		00	00	00	00	FF	FF	Emergency off (de-energize)
						FF	FE	Clear emergency off (energize)
						FF	FD	Emergency stop of all operations
						FF	FC	Clear emergency stop of all operations
						FF	F8	Node recorded a new log entry
						FE	00	Ident button combination pressed
						FD	01	Link error code 1 – the specific meaning is link wire protocol specific
						FD	02	Link error code 2
						FD	03	Link error code 3
						FD	04	Link error code 4

### 5.3 Well-Known

30 The following Event Identifiers are not automatically routed.

Value						Suffix		Description
Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8	
01	01	*	*	*	*	*	*	Well-Known Event Identifiers
		00	00	00	00	02	01	Duplicate Node ID Detected
						03	*	Reserved for Traction Protocol
						03	01	Reserved
						03	02	Reserved
						03	03	This node is a Train
						03	04	This node is a Traction Proxy
						06	*	Reserved for Firmware Upgrade Protocol
						06	01	Firmware Corrupted
						06	02	Firmware Upgrade Request by Hardware Switch
01	00	CBUS Node ID	CBUS Event ID	Subset of the assigned Node ID space for CBUS mapped nodes. Node ID is 00.00 for short events. This range is an ON request.				

Value						Suffix		Description
Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8	
01	01	*	*	*	*	*	*	Well-Known Event Identifiers
		01	01	CBUS Node ID		CBUS Event ID		Subset of the assigned Node ID space for CBUS mapped nodes. Node ID is 00.00 for short events. This range is an OFF request.

## Table of Contents

1 Introduction (Informative).....	1
2 Intended use (Informative).....	1
3 References and Context (Normative).....	1
4 Format (Normative).....	1
5 Allocation (Normative).....	2
5.1 Node ID Based.....	2
5.2 Well-Known Automatically-Routed.....	3
5.3 Well-Known.....	4